

# Wood heating

Logs and pellets

made in  
France  
ISO 14001 CERTIFIED


# INVICTA

Plus beau. Plus chaud. Moins cher.

N°1 IN EUROPE




	6418-74 NOLA 7	6013-84 REMILLY	6102-48 ELO M	6152-44 POW-WOW	6478-44 KAORI	6479-44 FIFTY ARCHE	6453-44 ARATOS
Page	22	23	24-25	26	27	28	29
Designation	<b>PELLET STOVE</b>	<b>CAST IRON STOVE</b>	<b>CAST IRON STOVE</b>	<b>CAST IRON STOVE</b>	<b>CAST IRON STOVE</b>	<b>CAST IRON STOVE</b>	<b>CAST IRON STOVE</b>
<b>DIMENSIONS AND WEIGHT</b>							
Height	1125	800	880	1895	773	755	1050
Width	465	436	500	Ø817	754	922	527
Depth	500	364	374	Ø817	404	442,5	453
Flue diameter	80	150	150	200	150	150	150
Flue height	210	-	-	-	601	568	-
Log length (cm)	Pellets feed hopper 16,5 kg	34	33	50	58	60	40
Weight (kg)	108	72	110	194	152	176,5	123
<b>HEATING PERFORMANCE</b>							
Optimal heat output (kW) <sup>1</sup>	7	7	5	14	9	10	8
Heat output adjustment <sup>2</sup>	2,5 to 7	4,5 to 10,5	3 to 7,5	9,5 to 21	6 to 13,5	6,5 to 15	5 to 12
Efficiency (%) <sup>3</sup>	80 to 86	78	75	76	75	76	78
CO level (%) <sup>4</sup>	0,02 to 0,06	0,10	0,09	0,09	0,1	0,08	0,07
Performance rate <sup>5</sup>	0,1	0,4	0,5	0,4	0,6	0,5	0,4
Flamme verte <sup>6</sup>	6 ★	7 ★	7 ★	7 ★	7 ★	7 ★	7 ★
Ductable Compatible with BBC RT 2012 <sup>7</sup>	-	-	✓	-	-	-	-
Autonomy Extended burning <sup>8</sup>	9 to 27h	8h	8h	8h	8h	8h	8h
Heating volume (m <sup>3</sup> ) <sup>9</sup>	65/210	100/210	65/150	185/420	125/275	135/300	105/240
Heating surface (m <sup>2</sup> ) <sup>10</sup>	25/85	40/85	25/60	75/170	50/110	55/120	40/100
Post combustion system <sup>11</sup>	-	-	✓	✓	✓	✓	✓
Adjustable secondary air <sup>12</sup>	-	✓	✓	✓	✓	✓	✓
Warranty <sup>13</sup>	2 years	5 years	5 years	5 years	5 years	5 years	5 years
Standard	EN14785	EN13240	EN13240 BlmSchV	EN13240 BlmSchV	EN13240 BlmSchV	EN13240 BlmSchV	EN13240 BlmSchV
Finish	Black Red Grey	Anthracite	White enamel	Anthracite	Anthracite	Anthracite Ivory enamel, red	Anthracite red

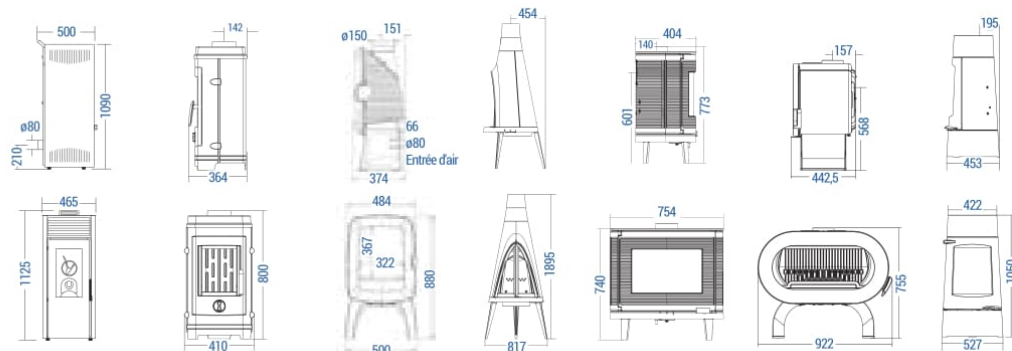




6190-44 AKIMIX	6196-44 MIX	6495-44 CAROLO MIX	6103-44 ALTARA	6103-14 ALTARA +	6109-44 ALCANDE	6107-44 ALCOR	6169-44 İLOT	6122-44 WABI
32-33	34	35	38- 39	38- 39	40	41	42	43
<b>HYBRID STOVE</b>	<b>HYBRID STOVE</b>	<b>HYBRID STOVE</b>	<b>DUCTABLE STOVE</b>	<b>DUCTABLE STOVE</b>	<b>DUCTABLE STOVE</b>	<b>DUCTABLE STOVE</b>	<b>DUCTABLE STOVE</b>	<b>DUCTABLE STOVE</b>
851	980	690	1050	1050	1200	1200	716	1120
766	805	799	450	450	450	450	613	400
372	463	434	450	450	482,5	450	619	400
150	150	150	150	150	150	150	150	150
697	-	-	-	-	-	-	572	863
38 or pellets feed hopper 15 kg	38 or pellets feed hopper 11 kg	35 or pellets feed hopper 15 kg	40	40	33	33	30	30
181	252	146	135	141	174	198	160	190
7	6	7	7	7	6	6	8	6
pellets 3,5 to 6,5	pellets 2,5 to 6,5	pellets 3,5 to 6,5	4,5 to 10,5	4,5 to 10,5	4 to 9	4 to 9	5 to 12	4 to 9
76	77	76	79	79	77	77	78	79
0,10	0,08	0,10	0,07	0,07	0,10	0,10	0,04	0,05
0,5	0,6	0,5	0,3	0,3	0,4	0,4	0,2	0,3
7 ★	6 ★	7 ★	7 ★	7 ★	7 ★	7 ★	7 ★	7 ★
-	✓	-	✓	✓	✓	✓	✓	✓
Pellets /wood 8 to 17h / 8h	Pellets /wood 6 to 13h / 8h	Pellets /wood 8 to 17h / 8h	8h	8h	8h	8h	intermittent	8h
95/210	80/180	100/210	100/210	100/210	80/180	80/180	105/240	80/180
40/85	30/70	40/85	40/85	40/85	30/70	30/70	40/100	30/70
✓	✓	✓	✓	✓	✓	✓	-	✓
✓	✓	✓	✓	✓	✓	✓	-	-
5 years	5 years	5 years	5 years	5 years	5 years	5 years	5 years	5 years
EN13240 BlmSchV	EN13240	EN13240	EN13240 BlmSchV	EN13240 BlmSchV	EN13240 BlmSchV	EN13240 BlmSchV	EN13240 BlmSchV	EN13240 BlmSchV
Anthracite	Anthracite	Anthracite	Anthracite	Anthracite	Anthracite	Anthracite	Anthracite	Anthracite

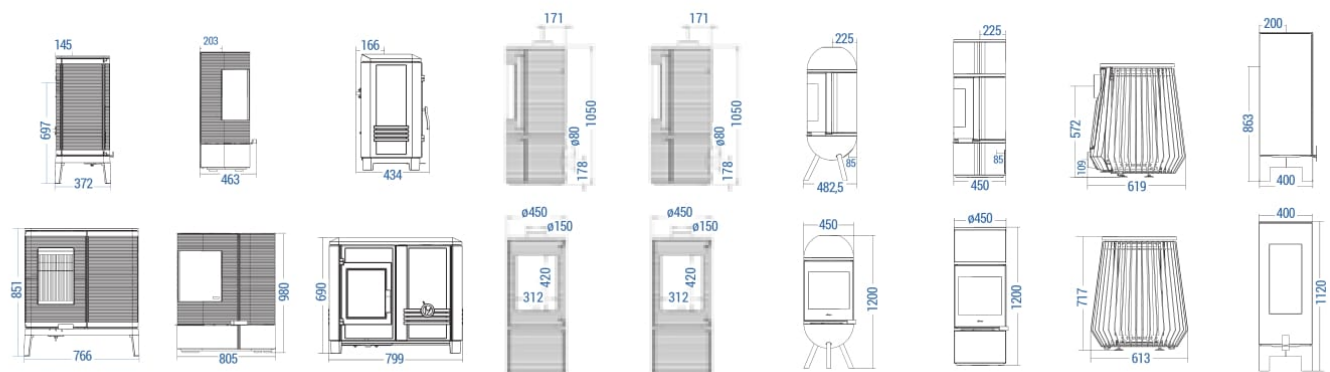







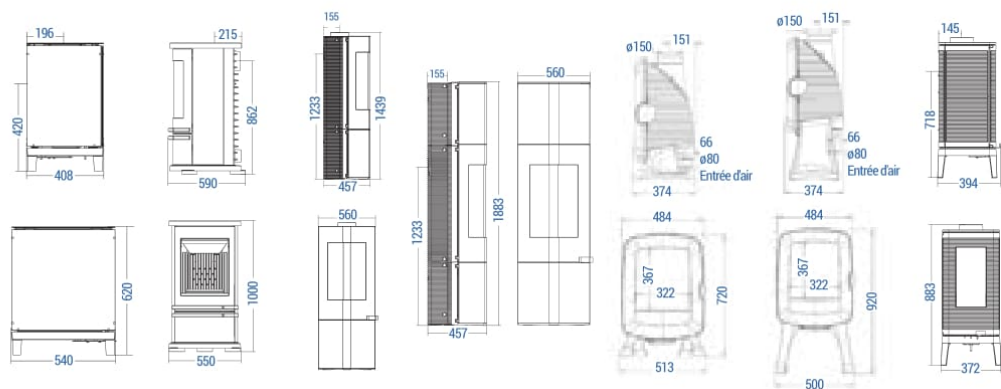


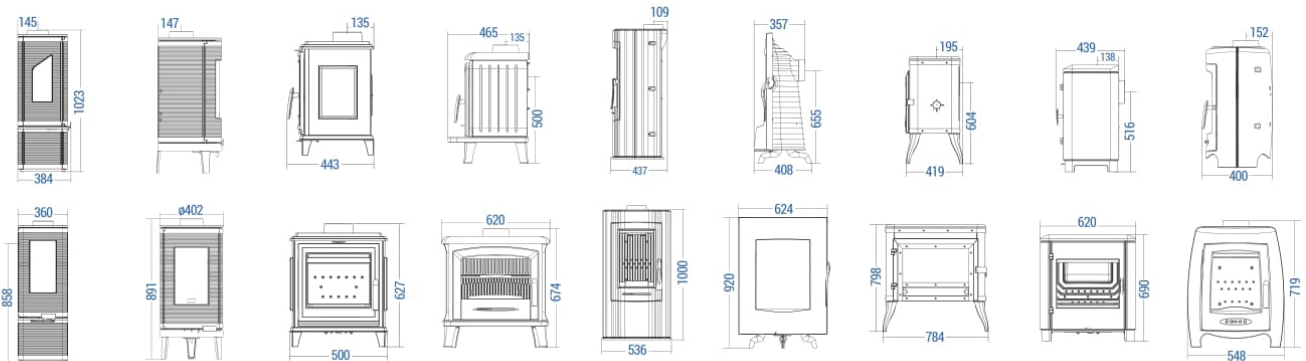




	6131-04 REVA	6194-44 ORENSE	6142-44 MOAI	6143-44 MANA	6102-14 ELO S	6102-44 ELO L	6106-44 IWAKI
Page	43	44	45	45	46-47	47	50
Designation	<b>DUCTABLE STOVE</b>	<b>DUCTABLE STOVE</b>	<b>DUCTABLE STOVE</b>	<b>DUCTABLE STOVE</b>	<b>DUCTABLE STOVE</b>	<b>DUCTABLE STOVE</b>	<b>CAST IRON STOVE</b>
<b>DIMENSIONS AND WEIGHT</b>							
Height	620	1000	1439	1883	720	920	883
Width	540	550	560	560	513	500	372
Depth	408	590	457	457	374	374	394
Flue diameter	150	150	180	180	150	150	150
Flue height	420	862	1233	1233	-	-	718
Log length (cm)	37	38	35	35	33	33	34
Weight (kg)	155	192	240	300	90	100	118
<b>HEATING PERFORMANCE</b>							
Optimal heat output (kW) <sup>1</sup>	5	8	8	8	5	5	7
Heat output adjustment <sup>2</sup>	3 to 7,5	5 to 12	5 to 12	5 to 12	3 to 7,5	3 to 7,5	4,5 to 10,5
Efficiency (%) <sup>3</sup>	78	76	77	77	75	75	78
CO level (%) <sup>4</sup>	0,08	0,13	0,08	0,08	0,09	0,09	0,07
Performance rate <sup>5</sup>	0,4	0,7	0,4	0,4	0,5	0,5	0,4
Flamme verte <sup>6</sup>	7 ★	6 ★	7 ★	7 ★	7 ★	7 ★	7 ★
Ductable Compatible with BBC RT 2012 <sup>7</sup>	✓	✓	✓	✓	✓	✓	-
Autonomy Extended burning <sup>8</sup>	8h	8h	8h	8h	8h	8h	8h
Heating volume (m <sup>3</sup> ) <sup>9</sup>	65/150	105/240	105/240	105/240	65/150	65/150	100/210
Heating surface (m <sup>2</sup> ) <sup>10</sup>	25/60	40/100	40/100	40/100	25/60	25/60	40/85
Post combustion system <sup>11</sup>	✓	✓	✓	✓	✓	✓	✓
Adjustable secondary air <sup>12</sup>	-	-	✓	✓	✓	✓	✓
Warranty <sup>13</sup>	5 years	5 years	5 years	5 years	5 years	5 years	5 years
Standard	EN13240 BlmSchV	EN13240 BlmSchV	EN13240 BlmSchV	EN13240 BlmSchV	EN13240 BlmSchV	EN13240 BlmSchV	EN13240 BlmSchV
Finish	Anthracite	Anthracite Chrome handles	Anthracite	Anthracite	Anthracite	Anthracite	Anthracite




								
6106-24 WAKI ON BASE SIDE GLASSES	6105-44 OKINO	9450-44 SEDAN S	9121-44 NORIK	6123-44 LUDIA	6199-44 MANDRA	6181-48 TENNESSEE	9162-44 CAROLO	6454-44 LA BORNE 2
51	51	52	53	54	55	56-57	58	59
CAST IRON STOVE	CAST IRON STOVE	CAST IRON STOVE	CAST IRON STOVE	CAST IRON STOVE	CAST IRON STOVE	CAST IRON STOVE	CAST IRON STOVE	CAST IRON STOVE
1023	891	627	674	1035	920	798	690	719
360	402	500	620	536	624	780	620	548
372	402	443	465	437	408	428	439	400
150	150	150	150	150	150	180	150	150
858	-	-	500	-	655	604	516	-
34	34	30	50	40	32	54	56	45
140	112	84	104	114	104	170	118	89
7	7	5	6	10	5	8	8	7
4,5 to 10,5	4,5 to 10,5	3 to 7,5	4 to 9	6,5 to 15	3 to 7,5	5 to 12	5 to 12	4,5 to 10,5
78	78	78	78	76	79	76,5	75	78
0,07	0,07	0,07	0,12	0,09	0,09	0,10	0,12	0,12
0,4	0,4	0,3	0,5	0,5	0,4	0,6	0,7	0,5
7 ★	7 ★	7 ★	7 ★	7 ★	7 ★	6 ★	7 ★	7 ★
-	-	-	-	-	-	-	-	-
8h	8h	8h	8h	8h	8h	8h	8h	8h
100/210	100/210	65/150	80/180	135/300	65/150	105/240	105/240	100/210
40/85	40/85	25/60	30/75	55/120	25/60	40/100	40/100	40/85
✓	✓	✓	✓	✓	✓	✓	✓	✓
✓	✓	✓	✓	✓	✓	✓	✓	✓
5 years	5 years	5 years	5 years	5 years	5 years	5 years	5 years	5 years
EN13240 BlmSchV	EN13240 BlmSchV	EN13240	EN13240	EN13240 BlmSchV	EN13240 BlmSchV	EN13240	EN13240	EN13240
Anthracite	Anthracite	Anthracite Red enamel, black, grey, ivory	Anthracite	Anthracite	Anthracite	Anthracite White enamel, red, black	Anthracite	Anthracite






	6198-44 SOREL	6137-44 CHÂTEL	6136-44 MESNIL	9148-44 SAMARA	9166-44 ALTÉA	6104-44 KAZAN	6104-43 KAZAN GA
Page	59	60	60	61	61	62	63
Designation	CAST IRON STOVE	CAST IRON STOVE	CAST IRON STOVE	CAST IRON STOVE	CAST IRON STOVE	CAST IRON STOVE	CAST IRON STOVE
<b>DIMENSIONS AND WEIGHT</b>							
Height	1055	830	986	644	744	801	801
Width	417	476	486,5	634	644	652	652
Depth	517,5	375	385	462	556	372	372
Flue diameter	97	150	150	150	150	150	150
Flue height	938,5	-	-	472	616	636	636
Log length (cm)	65	34	34	50	50	58	58
Weight (kg)	67	80	88	107	133	157	162
<b>HEATING PERFORMANCE</b>							
Optimal heat output (kW) <sup>1</sup>	8	8	8	6	8	9	9
Heat output adjustment <sup>2</sup>	5 to 12	5 to 12	5 to 12	4 to 9	5 to 12	6 to 13,5	6 to 13,5
Efficiency (%) <sup>3</sup>	75	77	77	78	75	76	76
CO level (%) <sup>4</sup>	0,29	0,09	0,09	0,12	0,12	0,08	0,08
Performance rate <sup>5</sup>	1,9	0,4	0,4	0,5	0,7	0,5	0,5
Flamme verte <sup>6</sup>	-	7 ★	7 ★	7 ★	7 ★	7 ★	7 ★
Ductable Compatible with BBC RT 2012 <sup>7</sup>	-	-	-	-	-	-	-
Autonomy Extended burning <sup>8</sup>	8h	8h	8h	8h	8h	8h	8h
Heating volume (m <sup>3</sup> ) <sup>9</sup>	105/240	105/240	105/240	80/180	105/240	125/275	125/275
Heating surface (m <sup>2</sup> ) <sup>10</sup>	40/100	40/100	40/100	30/70	40/100	50/110	50/110
Post combustion system <sup>11</sup>	-	-	-	✓	✓	✓	✓
Adjustable secondary air <sup>12</sup>	-	✓	✓	✓	✓	✓	✓
Warranty <sup>13</sup>	5 years	5 years	5 years	5 years	5 years	5 years	5 years
Standard	EN13240	EN13240 BlmSchV	EN13240 BlmSchV	EN13240	EN13240	EN13240 BlmSchV	EN13240 BlmSchV
Finish	Anthracite Ivory enamel, blue	Anthracite	Anthracite	Anthracite	Anthracite	Anthracite	Anthracite

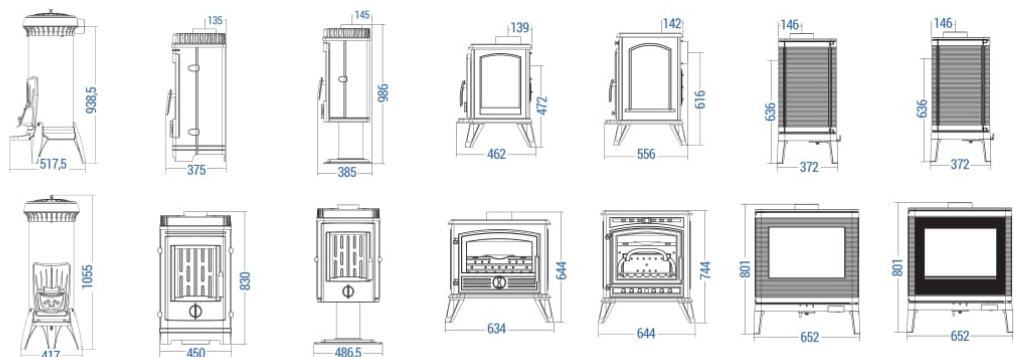







9170-44 SIAM	9172-44 SEDAN L	9160-48 SEDAN M	9174-44 RÉGENT	6145-44 MAIRY	6147-44 CASSINE	9173-47 BRADFORD	9175-45 MODENA	6480-44 FIFTY
64	65	65	66	66	67	68	69	70-71
CAST IRON STOVE	CAST IRON STOVE	CAST IRON STOVE	CAST IRON STOVE	CAST IRON STOVE	CAST IRON STOVE	CAST IRON STOVE	CAST IRON STOVE	CAST IRON STOVE
803	770	701	736	1098	977	690	741	850
700	766	644	764	524	513	730	764	922
451	523	463	480	426,5	415	613	508	442
150	180	150	150	150	150	150	150	150
615	616	556	562	-	-	509	562	663
60	60	42	50	40	40	54	50	60
143	164,5	126	170	107	103	175	170	180
12	12	10	10	10	10	9	10	10
8 to 18	8 to 18	6,5 to 15	6,5 to 15	6,5 to 15	6,5 to 15	6 to 13,5	6,5 to 15	6,5 to 15
75	75	75	75	76	76	75	75	76
0,11	0,12	0,12	0,12	0,09	0,09	0,12	0,12	0,08
0,7	0,7	0,7	0,7	0,5	0,5	0,7	0,7	0,5
7 ★	7 ★	7 ★	7 ★	7 ★	7 ★	7 ★	7 ★	7 ★
-	-	-	-	-	-	-	-	-
8h	8h	8h	8h	8h	8h	8h	8h	8h
160/360	160/360	135/300	135/300	135/300	135/300	125/275	135/300	135/300
65/145	65/145	55/120	55/120	55/120	55/120	50/110	55/120	55/120
✓	✓	✓	✓	✓	✓	✓	✓	✓
✓	✓	✓	✓	✓	✓	✓	✓	✓
5 years	5 years	5 years	5 years	5 years	5 years	5 years	5 years	5 years
EN13240	EN13240	EN13240	EN13240	EN13240 BlmSchV	EN13240 BlmSchV	EN13240	EN13240	EN13240 BlmSchV
Anthracite	Anthracite Ivory enamel, grey	Anthracite Ivory enamel, red, grey	Anthracite	Anthracite	Anthracite	Anthracite Ivory enamel, red	Anthracite Yellow enamel, ivory, red, grey	Anthracite Ivory enamel, red

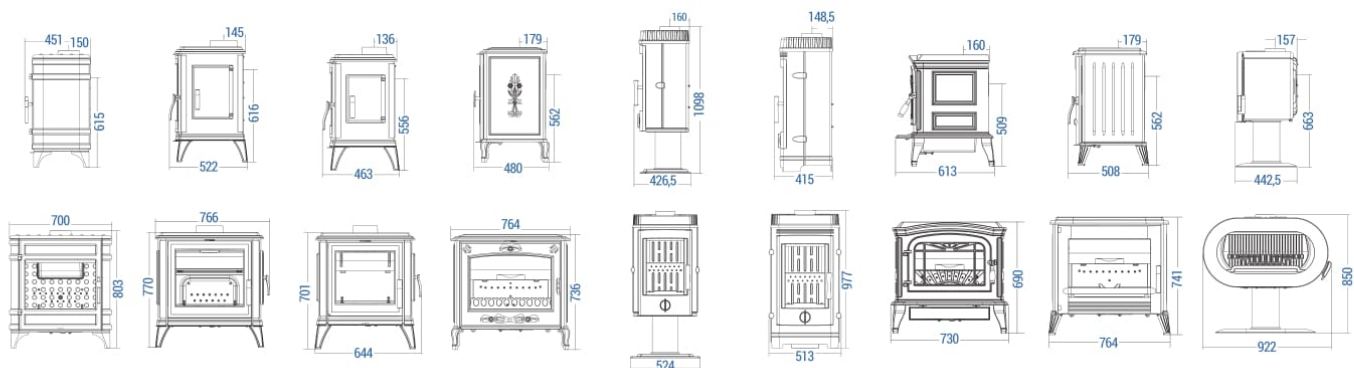






	6153-44 TIPI	6156-14 CHAMANE 10	6192-47 SEVILLE 2	6149-44 OVE	6182-43 LUNA	6114-44 ANTAYA	6113-44 THÉIA 6111-44 AKAN
Page	72	73	74-75	76	77	78	79-80
Designation	CAST IRON STOVE	CAST IRON STOVE	CAST IRON STOVE	CAST IRON STOVE	CAST IRON STOVE	CAST IRON STOVE	CAST IRON STOVE
<b>DIMENSIONS AND WEIGHT</b>							
Height	1585	1200	692	1310	810	899	913
Width	Ø 754	560	560	Ø 550	833	1051	1034
Depth	Ø 754	578	462,5	Ø 550	457	480	491
Flue diameter	200	180	150	180	180	180	180
Flue height	-	-	-	-	628	717	717
Log length (cm)	40	40	40	33	52	71	71
Weight (kg)	143	160	99	167	152	188	220
<b>HEATING PERFORMANCE</b>							
Optimal heat output (kW) <sup>1</sup>	10	10	7	10	10	12	12
Heat output adjustment <sup>2</sup>	6,5 to 15	6,5 to 15	4,5 to 10,5	6,5 to 15	6,5 to 15	8 to 18	8 to 18
Efficiency (%) <sup>3</sup>	78	76	77	76	80	76	76
CO level (%) <sup>4</sup>	0,05	0,09	0,08	0,07	0,14	0,10	0,10
Performance rate <sup>5</sup>	0,4	0,5	0,4	0,4	0,5	0,7	0,7
Flamme verte <sup>6</sup>	7 ★	7 ★	7 ★	7 ★	6 ★	6 ★	6 ★
Ductable Compatible with BBC RT 2012 <sup>7</sup>	-	-	-	-	-	-	-
Autonomy Extended burning <sup>8</sup>	8h	8h	8h	8h	8h	8h	8h
Heating volume (m <sup>3</sup> ) <sup>9</sup>	135/300	135/300	100/210	135/300	135/300	160/360	160/360
Heating surface (m <sup>2</sup> ) <sup>10</sup>	55/120	55/120	40/85	55/120	55/120	65/145	65/145
Post combustion system <sup>11</sup>	✓	✓	✓	✓	✓	✓	✓
Adjustable secondary air <sup>12</sup>	✓	✓	✓	✓	✓	✓	✓
Warranty <sup>13</sup>	5 years	5 years	5 years	5 years	5 years	5 years	5 years
Standard	EN13240 BlmSchV	EN13240 BlmSchV	EN13240	EN13240 BlmSchV	EN13240	EN13240	EN13240
Finish	Anthracite	Anthracite	Anthracite Ivory enamel, red, black	Anthracite	Anthracite Ivory enamel, red, black	Anthracite	Anthracite









6117-44 GAYA ARDOISE	6110-44 ITAYA	6115-44 SYMPHONIA	6120-46 ONYX	6129-44 NELSON	6129-04 AARON	6127-44 ELTON	6128-04 PRESTON	9159-44 PRÉSAGE10 9157-44 ORACLE10
80	81	81	82-83	84	85	86	87	88-89
CAST IRON STOVE	CAST IRON STOVE	CAST IRON STOVE	CAST IRON STOVE	CAST IRON STOVE	CAST IRON STOVE	CAST IRON STOVE	CAST IRON STOVE	CAST IRON STOVE
1143	846	913	1150	955	635	956	636	1200
1200	1051	1034	1650	910	910	910	910	560
503	431	491	537	480	481	480	468	578
180	180	180	180	180	180	180	180	180
822	664	717	555	-	-	791	depending on installation	-
71	71	71	71	80	80	80	80	44
206	187	199	284	201	179	210	179	169/166
12	12	12	12	12	12	14	14	10
8 to 18	8 to 18	8 to 18	8 to 18	8 to 18	8 to 18	9,5 to 21	9,5 to 21	6,5 to 15
76	76	76	76	70	70	75	75	76
0,10	0,10	0,10	0,10	0,15	0,15	0,15	0,15	0,09
0,7	0,7	0,7	0,7	1,2	1,2	0,8	0,8	0,5
6 ★	6 ★	6 ★	6 ★	-	-	6 ★	6 ★	7 ★
-	-	-	-	-	-	-	-	-
8h	8h	8h	8h	intermittent	intermittent	8h	8h	8h
160/360	160/360	160/360	160/360	160/360	160/360	185/425	185/425	135/300
65/145	65/145	65/145	65/145	65/145	65/145	75/170	75/170	55/120
✓	✓	✓	✓	-	-	✓	✓	✓
✓	✓	✓	✓	✓	✓	✓	✓	✓
5 years	5 years	5 years	5 years	5 years	5 years	5 years	5 years	5 years
EN13240	EN13240	EN13240	EN13240	EN13240	EN13240	EN13240	EN13240	EN13240
Anthracite	Anthracite	Anthracite	Steel surround White epoxy	Anthracite	Anthracite	Anthracite	Anthracite	Anthracite

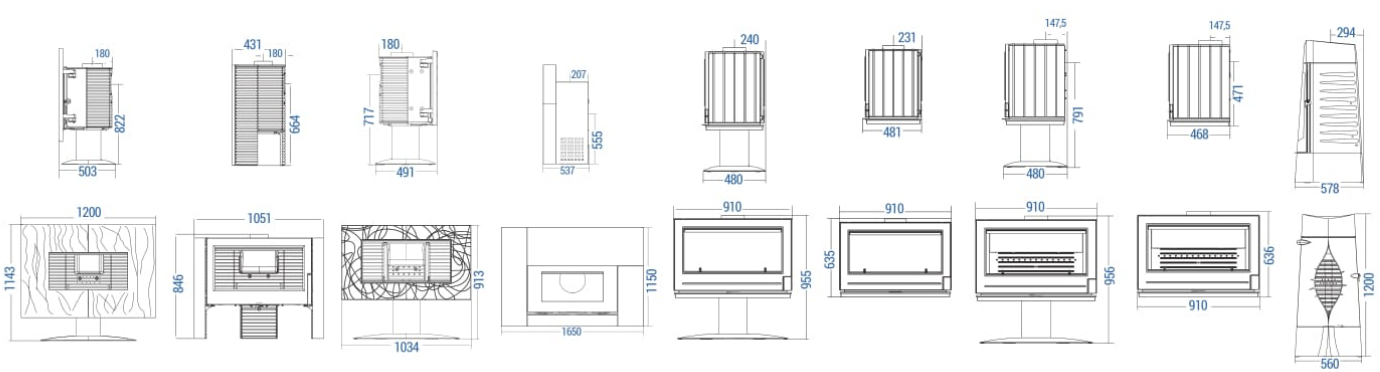




	6156-44 CHAMANE 14	9150-44 PHAROS	9151-44 ARGOS	9180-44 MANDOR	9186-44 ANGOR	6158-44 GOMONT	6488-14 ONSEN SIDE GLASSES
Page	89	90	91	92	93	93	96
Designation	CAST IRON STOVE	CAST IRON STOVE	CAST IRON STOVE	CAST IRON STOVE	CAST IRON STOVE	CAST IRON STOVE	STEEL STOVE
<b>DIMENSIONS AND WEIGHT</b>							
Height	1200	1240,5	1250	770	770	1130	1048
Width	560	531,5	532	852	820	550	502,5
Depth	578	530	444	492	471	447,5	518
Flue diameter	180	180	180	150	150	150	150
Flue height	-	-	-	608	608	-	-
Log length (cm)	44	40	40	60	60	45	40
Weight (kg)	160	167,5	169	144	153	128	126
<b>HEATING PERFORMANCE</b>							
Optimal heat output (kW) <sup>1</sup>	14	12	12	12	12	12	6
Heat output adjustment <sup>2</sup>	9,5 to 21	8 to 18	8 to 18	8 to 18	8 to 18	8 to 18	4 to 9
Efficiency (%) <sup>3</sup>	78,7	75	75	75	75	75	81
CO level (%) <sup>4</sup>	0,05	0,10	0,10	0,11	0,11	0,10	0,09
Performance rate <sup>5</sup>	0,5	0,7	0,7	0,7	0,7	0,6	0,4
Flamme verte <sup>6</sup>	-	7 ★	7 ★	7 ★	7 ★	7 ★	7 ★
Ductable Compatible with BBC RT 2012 <sup>7</sup>	-	-	-	-	-	-	-
Autonomy Extended burning <sup>8</sup>	8h	8h	8h	8h	8h	8h	8h
Heating volume (m <sup>3</sup> ) <sup>9</sup>	185/425	160/360	160/360	160/360	160/360	160/360	80/180
Heating surface (m <sup>2</sup> ) <sup>10</sup>	75/170	65/145	65/145	65/145	65/145	65/145	30/70
Post combustion system <sup>11</sup>	✓	✓	✓	✓	✓	✓	✓
Adjustable secondary air <sup>12</sup>	✓	✓	✓	✓	✓	✓	✓
Warranty <sup>13</sup>	5 years	5 years	5 years	5 years	5 years	5 years	5 years
Standard	EN13240	EN13240	EN13240	EN13240	EN13240	EN13240 BlmSchV	EN13240 BlmSchV
Finish	Anthracite	Anthracite	Anthracite	Anthracite	Anthracite	Anthracite	Black

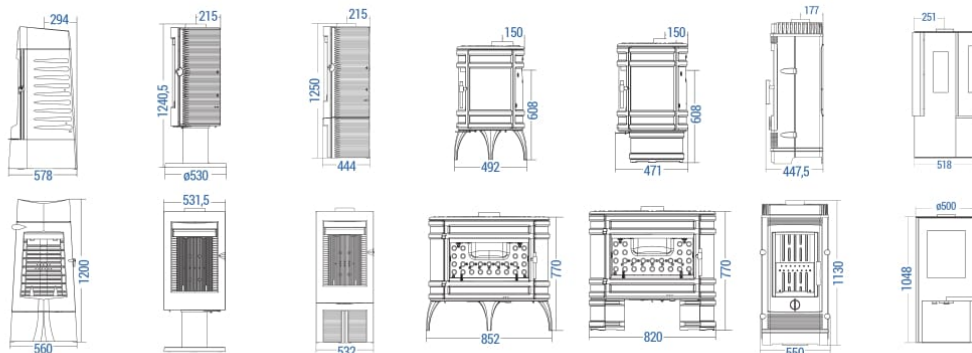

									
6488-10 ONSEN	6488-11 ONSEN DUCTABLE	6488-00 AURES	6488-35 SKARA	6488-30 NARVIK	6488-20 TANA	6488-21 TANA ON BASE 6488-22 TANA GA ON BASE	6409-7X SERINO 7	6420-00 PHILIA 9E	
97	97	98	98	99	100	101	104	105	
<b>STEEL STOVE</b>	<b>STEEL STOVE</b>	<b>STEEL STOVE</b>	<b>STEEL STOVE</b>	<b>STEEL STOVE</b>	<b>STEEL STOVE</b>	<b>STEEL STOVE</b>	<b>PELLET STOVE</b>	<b>PELLET STOVE</b>	
1048	1048	734	1239	1360	930	1145	950	988	
502,5	502,5	699	519	555	710	710	470	472	
518	518	519	446	555	510	510	560	468	
150	150	150	150	150	150	150	80	80	
-	-	590	1108	1215	827	1020	140	235	
40	40	51	27	37	51	51	Pellets feed hopper 15 kg	Pellets feed hopper 16,5 kg	
126	135	85	112	130	107	135	83	134	
6	6	8,5	7	7	8	8	7	9	
4 to 9	4 to 9	5,5 to 13	4,5 to 10,5	4,5 to 10,5	5 to 12	5 to 12	3,1 to 7,3	3,4 to 9	
81	78	77	81,8	79	81	80	87 to 90	87,3	
0,09	0,07	0,09	0,10	0,09	0,06	0,04	0,02 to 0,04	0,016	
0,4	0,4	0,5	0,4	0,5	0,3	0,3	0,1	0,1	
7 ★	7 ★	7 ★	7 ★	7 ★	7 ★	7 ★	6 ★	7 ★	
-	✓	-	✓	✓	-	✓	-	-	
8h	8h	8h	8h	8h	8h	8h	8 to 21h	7 to 20h	
80/180	80/180	110/255	100/210	100/210	105/240	105/240	75/225	180/275	
30/70	30/70	45/105	40/85	40/85	40/100	40/100	30/90	40/100	
✓	✓	✓	✓	✓	✓	✓	-	-	
✓	✓	✓	✓	✓	✓	✓	-	-	
5 years	5 years	5 years	5 years	5 years	5 years	5 years	2 years	2 years	
EN13240 BlmSchV	EN13240 BlmSchV	EN13240 BlmSchV	EN13240 BlmSchV	EN13240 BlmSchV	EN13240 BlmSchV	EN13240 BlmSchV	EN14785	EN14785	
Black	Black	Black	Black	Black	Black	Black	Black Grey	Black	

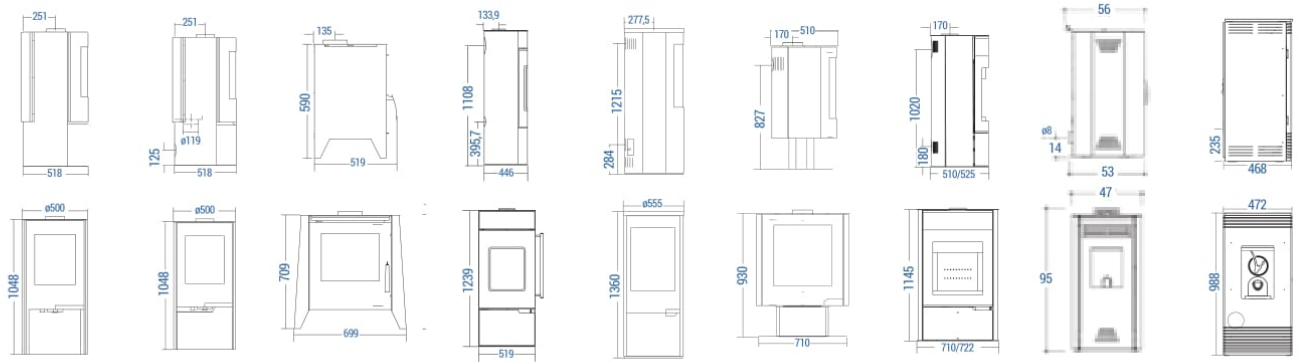





	6420-01 UBLO 9E	6419-7X LODI 10	6419-6X LODI 7	6418-1X NOLA 10	6412-6X TRATTO 6	6412-9X TRATTO 9	6413-94 VASTO 9
Page	106-107	108	108	109	110	110	112
Designation	PELLET STOVE	PELLET STOVE	PELLET STOVE	PELLET STOVE	PELLET STOVE	PELLET STOVE	PELLET STOVE
<b>DIMENSIONS AND WEIGHT</b>							
Height	985	1125	1125	1125	1010	1010	965
Width	490	585	585	465	540	540	465
Depth	500	570	570	500	520	520	485
Flue diameter	80	80	80	80	80	80	80
Flue height	235	210	210	210	215	215	215
Log length (cm)	Pellets feed hopper 16,5 kg	Pellets feed hopper 16,5 kg	Pellets feed hopper 16,5 kg	Pellets feed hopper 16,5 kg	Pellets feed hopper 16,5 kg	Pellets feed hopper 16,5 kg	Pellets feed hopper 16,5 kg
Weight (kg)	134	108	108	108	85	85	85
<b>HEATING PERFORMANCE</b>							
Optimal heat output (kW) <sup>1</sup>	9	10	7	10	6	9	9
Heat output adjustment <sup>2</sup>	3,4 to 9	2,5 to 10	2,5 to 7	2,5 to 10	2,5 to 6	2,5 to 9	2,5 to 9
Efficiency (%) <sup>3</sup>	87,3	80 to 86	80 to 86	80 to 86	87 to 90	87 to 90	87 to 90
CO level (%) <sup>4</sup>	0,016	0,02 to 0,06	0,02 to 0,06	0,02 to 0,06	0,02 to 0,06	0,02 to 0,06	0,02 to 0,06
Performance rate <sup>5</sup>	0,1	0,1	0,1	0,1	0,1	0,1	0,1
Flamme verte <sup>6</sup>	7 ★	6 ★	6 ★	6 ★	6 ★	6 ★	6 ★
Ductable Compatible with BBC RT 2012 <sup>7</sup>	-	-	-	-	-	-	-
Autonomy Extended burning <sup>8</sup>	7 to 20h	7 to 27h	9 to 27h	7 to 27h	11 to 27h	7 to 27h	7 to 27h
Heating volume (m <sup>3</sup> ) <sup>9</sup>	100/275	85/300	65/210	85/300	65/180	85/275	85/275
Heating surface (m <sup>2</sup> ) <sup>10</sup>	40/110	35/120	25/85	35/120	25/70	35/110	35/110
Post combustion system <sup>11</sup>	-	-	-	-	-	-	-
Adjustable secondary air <sup>12</sup>	-	-	-	-	-	-	-
Warranty <sup>13</sup>	2 years	2 years	2 years	2 years	2 years	2 years	2 years
Standard	EN14785	EN14785	EN14785	EN14785	EN14785	EN14785	EN14785
Finish	Anthracite	Black Red Grey	Black Red Grey	Black Red Grey	Black Grey	Black Grey	Black

